

Hanshow ESL Specification

Hanshow Lumina Slim-970



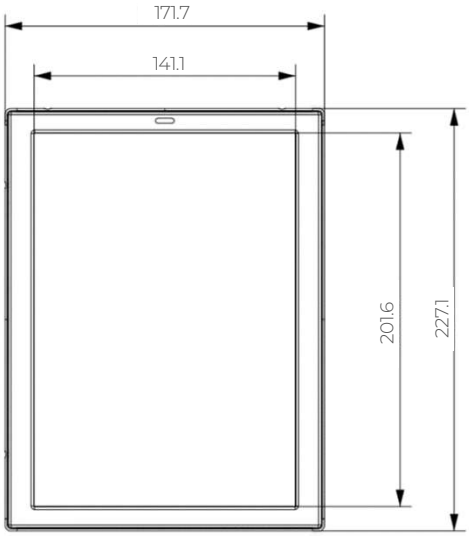



TECHNICAL DETAILS	
Product Dimensions (mm*mm*mm)	171.7*227.1*7.1
Active Display Area (mm*mm)	141.1*201.6
Case Color	White (optional)
Display Size (inch)	9.7
Resolution (pixel)	1,120*784
DPI	141
Display Color	Black/White/Red/Yellow/Blue/Green/Orange
NFC	Support
Battery Life	Up to 10 years (1 update/day)
Battery Type	$LiMnO_2$
Battery Module	Replaceable
Working Temperature (℃)	0-40
Working Humidity (%RH)	45-65
Protection Level	IP5X
Lens	No
Certification	RoHS, CE
RF Wireless Communication	Working Frequency: 2,402MHz~2,480MHz


* See related manual for more information.

2025 · All specified values are subject to change by Hanshow Technology
www.hanshow.com

Hanshow ESL Specification

Hanshow Lumina Slim-1330



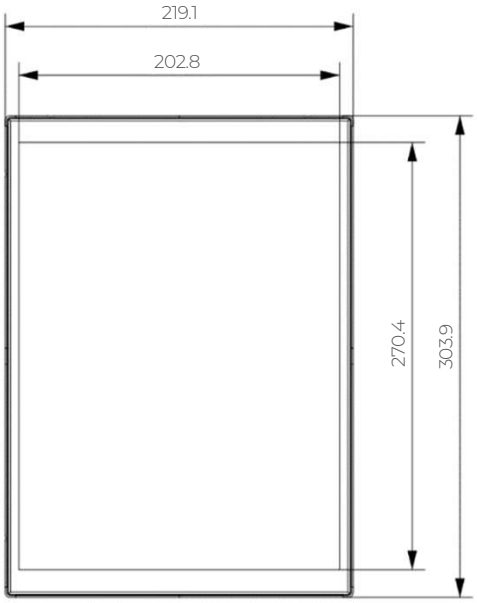



TECHNICAL DETAILS	
Product Dimensions (mm*mm*mm)	219.1*303.9*7.1
Active Display Area (mm*mm)	202.8*270.4
Case Color	White (optional)
Display Size (inch)	13.3
Resolution (pixel)	1,200*1,600
DPI	150
Display Color	Black/White/Red/Yellow/Blue/Green
NFC	Support
Battery Life	Up to 10 years (1 update/day)
Battery Type	$LiMnO_2$
Battery Module	Replaceable
Working Temperature (℃)	0-40
Working Humidity (%RH)	45-65
Protection Level	IP5X
Lens	No
Certification	RoHS, CE
RF Wireless Communication	Working Frequency: 2,402MHz~2,480MHz

* See related manual for more information.

2025 · All specified values are subject to change by Hanshow Technology
www.hanshow.com